


DESCRIPTION

Specification grade 50 watt MR16 adjustable fixture rated for direct contact with insulation (71W MR16 in Remote). Adjustment mechanism features hot aiming capability, aiming marks and toolless locking. Optics provide glare free 50° cutoff to lamp and lamp image. For use with all halogen MR16 lamp varieties. **Optical element can be changed after installation to provide a variety distributions. E.G. into a downlight**

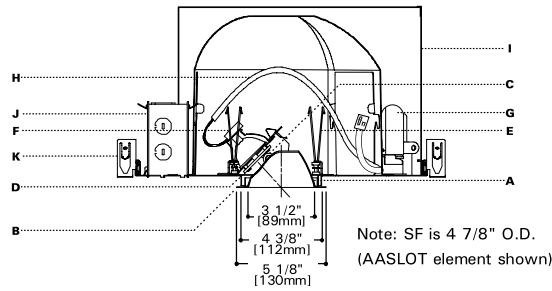

SPECIFICATION FEATURES

A...Reflector

Slot cut cone minimizes view into interior. .040 thick aluminum spun parabolic reflector in Clear, Gold, Haze, Warm Haze, Black Alzak® finish, painted gloss white or matte white. Other options upon request. E3AA20 recommended for ceilings over 7/8" thick.

B...Flange

Self flange reflector or die-cast flange with either matte white or clear coat finish. Die-cast flanges are easily removed for field painting. Elements are keyed for proper insertion.

C...Adjustability

Removable lamp adjustment mechanism provides up to 45° tilt and 361° rotation and locks into any aiming position. Unit is relamped without unlocking adjustments. Translating centerbeam optics maximize light output.

D...Lens

Soft focus lens standard in platform for smooth beam patterns. Up to two filter media can be used which are retained during relamping.

E...Attachment

Positive torsion springs pull flange tight to ceiling. Mechanical light trap eliminates spill light at edge of flange or reflector.

F...Socket

GX5.3 base for Bi-pin MR16 lamps. Back light shield keeps interior of fixture dark.

G...Transformer

Truvolt® toroidal transformer with dual-output taps for proper 12.0V operation and quiet operation when dimmed. Dimmer tap compensates for inherent voltage loss from dimmers, resulting in 30% more lumens than traditional laminated transformers. Toroidal design, with 90% or greater efficiency, features a rolled one-piece continuous core of M3 grade grain oriented silicon steel complete with an integral thermal to protect against overheating. For dimming, use dimmers rated for electromagnet-

ic transformers. **Transformer is warranted for 5 years and is serviceable from below ceiling.**

Note: If a dimming system is operated for construction lighting in its "shunt" mode, i.e. bypassing the dimmer modules, for an extended period of time, fixtures with the dual-tap toroidal transformer should be operated on the "Switched Fixture" output until the dimmers are in use. Operating fixtures on the "Dimmed Fixture" output with a full 120v input for an extended period will overdrive the lamp and cause shortened lamp life.

H...Electrical

Keyed quick connect for low voltage socket lead. Transformer is serviceable from below ceiling.

I...Frame/Housing

Hot dipped galvanized 20 gauge steel frame with built in 1/2 inch plaster lip. Aluminum .032 thick housing allows for heat dissipation and reduces weight. Matte black housing interior.

J...Junction Box

18 cubic inches, listed for 4#12 AWG or 6#14 AWG 90° C additional feed through conductors, has six 1/2 inch pryouts.

K...Bar Hangers


No Flex® bar hangers with positive locking, for use with wood, engineered wood and steel frame joists spaced up to 24" O.C. ship with platform. For use in T-bar ceilings order accessory MBCLP clips. Nailless barb and locator lip provide consistent installation height.

L...Codes

Thermally protected, IP labeled, for use in direct contact with insulation. Meets Washington State Air tight requirements, 1995 CABO Model Energy Code.

M...Labels


UL AND cUL listed, standard damp label, IBEW union made.



**P3MR
E3AA
E3SLOT**

50 W MR 16

**3" ADJUSTABLE
ACCENT**



Ceiling Cutout
4 3/4" [112mm]

Energy Data

120V Input

Lamp Watts	Input Watts	Operating Current
20	23	.19
35	41	.34
37	42	.35
42	47	.39
50	57	.48

E3AA



E3AA2

E3SLOT







ORDERING INFORMATION

Complete unit consists of a platform and element

Platform	Optical Element	Finish	Flange	Accessories
P3MR				
P3MR = 3" Airtight IC Rated Housing P3MR-REMOTE = 3" Airtight IC Rated Housing For Remote Transformer	E3AA = MR16 0° - 45° Adjustable Accent E3AA20 = MR16 0° - 20° Adjustable Accent E3SLOT = MR16 0° - 45° Adjustable Accent Slot Cut Reflector	Standard C = Clear H = Haze G = Gold B = Black WMH = Warm Haze W = Gloss White MW = Matte White Custom K = Cognac KH = Cognac Haze	Custom Cont. CC = Chocolate CCH = Chocolate Haze BU = Blush BUH = Blush Haze GP = Graphite GPH = Graphite Haze PN = Pine PNH = Pine Haze SK = Sky SKH = Sky Haze	Blank = White die-cast SF = Self Flange RAW = Natural Die Cast SFWF = Self Flange Painted White MBCLP = 40 Push On T Bar Clips (for 10 Units) PLE3 = Plaster Lip Extension for Max 2" Thick Ceiling FMC3 = Flush Mount Collar LSPD = Spread Lens LLNR = Linear Spread Lens LUV = UV Reduction Lens LLPINK = Light Pink lens LLSTRAW = Light Straw lens L27K = 2700K dichroic filter LDAY = Daylight lens LSPINK = Surprise Pink lens LPLAV = Pale Lavender lens LHEX = Hex Cell Louver Lens LSNOOT = SNOOT

PHOTOMETRICS



Lamp	Luminance cd/m ² @ Maximum Tilt		0° Aiming Angle Horizontal Footcandles				30° Aiming Angle Horizontal Footcandles					30° Aiming Angle Vertical Footcandles					45° Aiming Angle Vertical Footcandles					
	Degree	@ 180° @ 90°	D	FC	L	W	D	FC	L	W	CB	D	FC	L	W	CB	D	FC	L	W	CB	
GE Q20 MR16C/VNSP/7 Lumens: 200 Beam Spread: 7° CBCP: 7,400	85°	0	6'	145	0.7	0.6	6'	81	1.1	0.8	3.5	2'	174	0.8	0.5	3.5	2'	521	0.4	0.3	2	
	75°	0	8'	81	1	0.8	8'	46	1.5	1	4.6	3'	77	1.2	0.8	5.2	3'	231	0.6	0.5	3	
	65°	0	10'	52	1.2	1	10'	29	1.9	1.3	5.8	4'	43	1.7	1	6.9	4'	130	0.8	0.7	4	
	55°	0	12'6"	33	1.5	1.3	12'6"	19	2.3	1.6	7.2	5'	28	2.1	1.3	8.7	5'	83	0.9	0.8	5	
	45°	922	922	Test # H21231				Test # H21235					Test # H21235					Test # H21238				
Test # H21238																						
OS Q37 MR16/R/SP10 Lumens: 900 Beam Spread: 10° CBCP: 13,100	85°	0	6'	321	0.9	1.2	6'	181	1.5	1.1	3.5	2'	355	1.3	0.7	3.5	2'	986	0.6	0.5	2	
	75°	0	8'	180	1.3	1.6	8'	102	1.9	1.5	4.6	3'	158	1.9	1	5.2	3'	438	1	0.7	3	
	65°	0	10'	115	1.6	2	10'	65	2.4	1.9	5.8	4'	89	2.5	1.3	6.9	4'	247	1.3	1	4	
	55°	284	284	12'6"	74	2	2.5	12'6"	42	3	2.3	7.2	5'	57	3.1	1.7	8.7	5'	158	1.6	1.2	5
	45°	3225	2304	Test # H21252				Test # H21251					Test # H21251					Test # H21250				
Test # H21250																						
GE Q42MR16C/VNSP/9 Lumens: 575 Beam Spread: 9° CBCP: 12,500	85°	0	6'	263	0.7	1.2	6'	144	1.1	1.2	0	2'	287	1	0.7	3.5	2'	806	0.5	0.5	2	
	75°	0	8'	148	1	1.6	8'	81	1.5	1.6	0	3'	128	1.5	1	5.2	3'	358	0.8	0.8	3	
	65°	0	10'	95	1.2	2	10'	52	1.9	2	0	4'	72	2	1.4	6.9	4'	201	1	1.1	4	
	55°	0	12'6"	61	1.5	2.5	12'6"	33	2.4	2.5	0	5'	46	2.4	1.7	8.7	5'	129	1.3	1.3	5	
	45°	922	1382	Test # H21215				Test # H21214					Test # H21214					Test # H21213				
Test # H21213																						
PH Q45 MRC16/IRC/SP8 Lumens: 1030 Beam Spread: 8° CBCP: 16,000	85°	0	6'	343	1	1.2	6'	152	1.5	1.6	3.5	2'	299	1.3	0.9	3.5	2'	859	0.7	0.6	2	
	75°	0	8'	193	1.3	1.6	8'	86	2	2.2	4.6	3'	133	2	1.3	5.2	3'	382	1	0.9	3	
	65°	0	10'	124	1.6	2	10'	55	2.6	2.7	5.8	4'	75	2.6	1.8	6.9	4'	215	1.3	1.2	4	
	55°	1136	284	12'6"	79	2	2.5	12'6"	35	3.2	3.4	7.2	5'	48	3.3	2.2	8.7	5'	137	1.7	1.5	5
	45°	3456	2304	Test # H21222				Test # H21129					Test # H21129					Test # H21230				
Test # H21230																						
GE Q50 MR16C/NSP15 Lumens: 750 Beam Spread: 15° CBCP: 12,500	85°	0	6'	220	1.5	1.8	6'	143	1.7	1.7	3.5	2'	252	1.5	1	3.5	2'	690	0.8	0.7	2	
	75°	629	629	8'	124	2	2.4	8'	80	2.2	2.3	4.6	3'	112	2.3	1.5	5.2	3'	306	1.2	1.1	3
	65°	385	385	10'	79	2.5	3	10'	51	2.8	2.9	5.8	4'	63	3	2	6.9	4'	172	1.6	1.5	4
	55°	568	284	12'6"	51	3.1	3.8	12'6"	33	3.5	3.6	7.2	5'	40	3.8	2.5	8.7	5'	110	2	1.8	5
	45°	3686	1382	Test # H21241				Test # H21245					Test # H21245					Test # H21246				
Test # H21246																						
GE Q50 MR16C/NFL25 Lumens: 884 Beam Spread: 25° CBCP: 9,500	85°	0	6'	86	2.4	3	6'	50	3	3.2	3.5	2'	115	2.2	1.7	3.5	2'	269	1.3	1.3	2	
	75°	0	8'	48	3.1	4	8'	28	4	4.3	4.6	3'	51	3.3	2.5	5.2	3'	119	1.9	1.9	3	
	65°	0	10'	31	3.9	5	10'	18	5	5.4	5.8	4'	29	4.5	3.4	6.9	4'	67	2.6	2.5	4	
	55°	281	281	12'6"	20	4.9	6.3	12'6"	12	6.2	6.7	7.2	5'	18	5.6	4.2	8.7	5'	43	3.2	3.2	5
	45°	7059	1366	Test # H21182				Test # H21194					Test # H21194					Test # H21195				
Test # H21195																						
GE Q50 MR16C/FL40 Lumens: 800 Beam Spread: 40° CBCP: 1,700	85°	0	6'	57	2.9	4.2	6'	29	4.3	4.1	3.5	2'	102	1.8	1.7	3.5	2'	169	1.5	1.6	2	
	75°	622	622	8'	32	3.9	4.9	8'	16	5.7	5.5	4.6	3'	45	2.7	2.5	5.2	3'	75	2.3	2.4	3
	65°	381	381	10'	21	4.9	7	10'	11	7.1	6.9	5.8	4'	26	3.6	3.3	6.9	4'	42	3	3.2	4
	55°	842	281	12'6"	13	6.1	8.8	12'6"	7	8.9	8.6	7.2	5'	16	4.5	4.2	8.7	5'	27	3.8	3.9	5
	45°	14345	1822	Test # H21249				Test # H21199					Test # H21199					Test # H21198				
Test # H21198																						

Notes and Definitions:

Luminance: To convert cd/m² to footlamberts, multiply by 0.2919

- Data is based upon bare lamps photometrics.
- Beam spread is to 50% center beam candlepower (CBCP).

D = Distance to floor or wall.


FC = Footcandles on floor or wall at center beam aiming location.

L = Effective Visual Beam length in feet (50% of maximum footcandle level.)

W = Effective Visual Beam width in feet (50% of maximum footcandle level.)

CB = Distance across or down to center beam location.

The "real world photometrics" shown here are from off the shelf lamps in fixtures using a clear lens and operated at 12.0 volts. Please see page 64 & 65 of the IRI's catalog for a further discussion and appropriate correction multipliers.

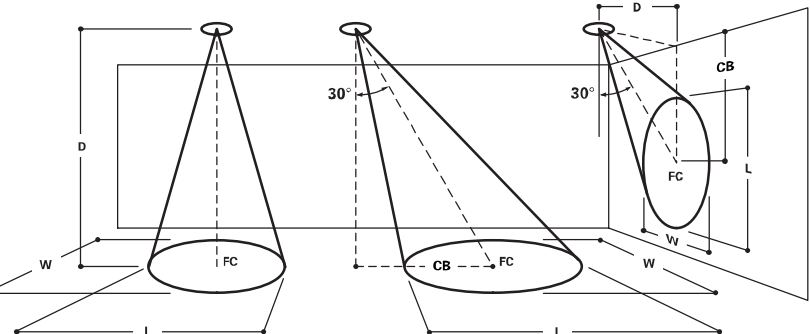

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com